

SmartPIN L100™

PCI 4.x Certified Modular PIN Entry Device with LCD Display

Encrypted PIN Entry Device

The SmartPIN L100 is a PCI 4.x certified PIN Entry Device designed for outdoor unattended POS operations where encrypted PIN entry is required. The SmartPIN L100 supports TDES encryption algorithm using DUKPT and Master/Session key management. The SmartPIN L100 can be used in fuel dispensers, kiosks, vending machines, and other POS systems that accept credit and debit payments.

Rugged and Weatherproof PIN Entry Device

The SmartPIN L100's robust, vandal resistant design features a molded body, a stainless steel cover, and metal engraved keys, allowing the PIN pad to be used in unattended environments. For further security, tamper switches and removal detection sensors protect the PIN pad from malicious activity. The SmartPIN L100 can also be used in outdoor environments with waterproof keys and a built-in gasket to withstand splashed, spilled, and direct liquid spray.

Ideal for Integrating Into a Chip and PIN Solution

When integrated with ID TECH's Spectrum Pro, the SmartPIN L100 is an ideal product for a Chip and PIN Solution. The two products can also be paired with the contactless antenna from the ViVOpay Kiosk III to accept NFC contactless payments in outdoor and unattended applications such as parking, vending machines, kiosks, and other POS systems.

Features and Benefits:

- Payment Card Industry (PCI 4.x) Certified
- Meets ADA, ANSI and ISO standards for a PIN Entry Device (PED)
- 4 screw holes and built-in gasket for watertight mounting
- IP65 rated and NEMA 4 rated keypad
- Removal detection and tamper resistant
- Secure scheme for authorized activation/installation
- TDES encryption algorithm
- Key management: Master/Session, DUKPT
- LCD Display
- Rugged, vandal resistant design for outdoor, indoor & unattended applications



SmartPIN L100™

Specifications

Electrical

Power Requirements: 5VDC, $\pm 10\%$, 180mA maximum
Interfaces: RS232 or USB-HID

Environmental

Operating Temperature: -13°F to 158°F (-25°C to 70°C)
Storage Temperature: -22°F to 149°F (-30°C to 65°C)
Humidity: Maximum 95% non-condensing



Reliability

Operating Life: Minimum 2,000,000 operations
MTBF: 120,000 power-on hours calculated
ESD Immunity: Minimum 4KV direct contact & 8KV air discharge without resetting
Approvals: FCC and CE
Warranty: One year, parts and labor

Mechanical

Dimension (L)x(W)x(H): 5.51 inches (140 mm) x 4.23 inches (107.5 mm) x 1.10 inches (27.9 mm)
Keys: Numeric (12), Operation (4), Function (3)

Footprint:

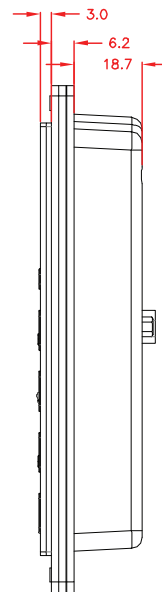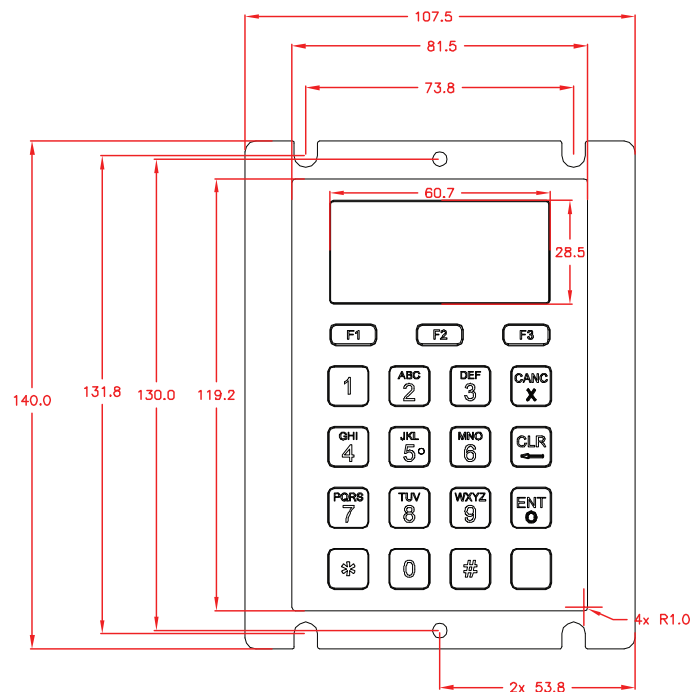

United States Sales Office

Corporate Headquarters

10721 Walker Street
Cypress, CA 90630
Phone: (714) 761-6368
Toll Free: (800) 984-1010
Fax: (714) 761-8880
sales@idtechproducts.com

International Sales Offices

Asia

+866-3-496-6988 (Taiwan)
asia@idtechproducts.com.tw

Canada

+450-465-5261
robertop@idtechproducts.com

South America

+55-11-3079-2255
internationalsales@idtechproducts.com

Europe

+011-44-1925-269550
emea@idtechproducts.com

ISO 9001 Certified



Value through Innovation

www.idtechproducts.com

